
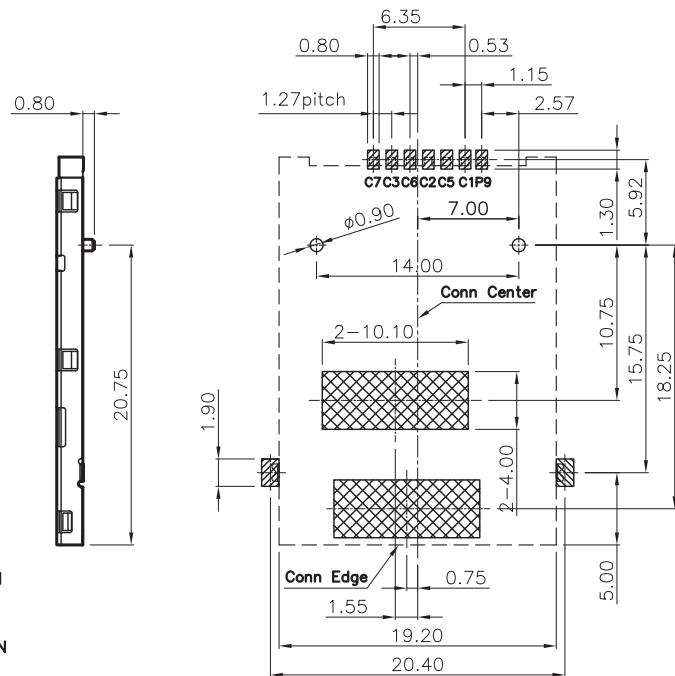


REV.	DESCRIPTION	DATE
A	RELEASE	May 22, 2013

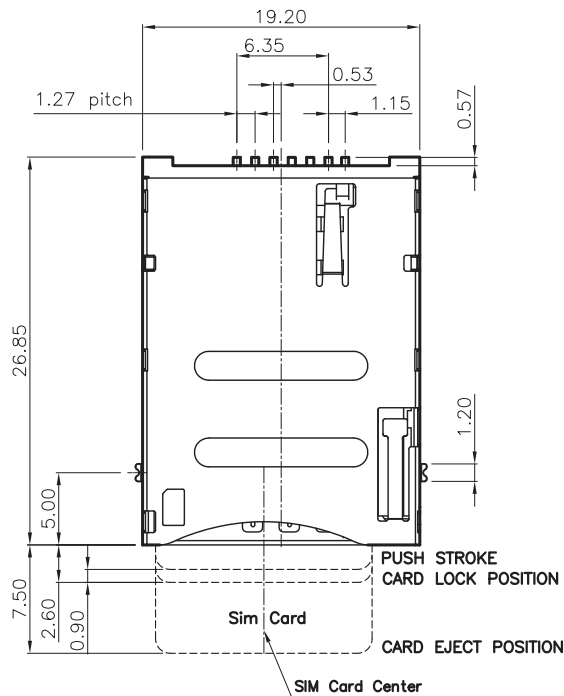

- PAD AREA
- KEEP AREA
- KEEP OUT AREA

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW




MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0).
- TERMINAL : COPPER ALLOY, PLATING SEE TABLE.
- SHELL : SUS.


SPECIFICATION

- CURRENT RATING : 1.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
- CONTACT RESISTANCE : 100m Ω MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.
- MATING CYCLES : 5000 INSERTIONS.

PART NUMBER INFORMATION :

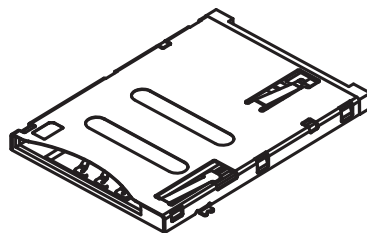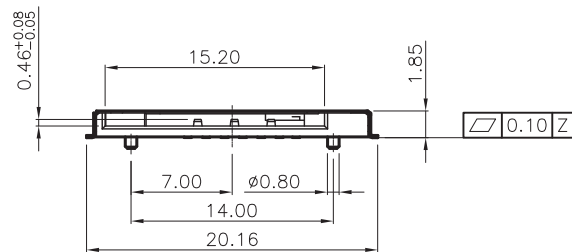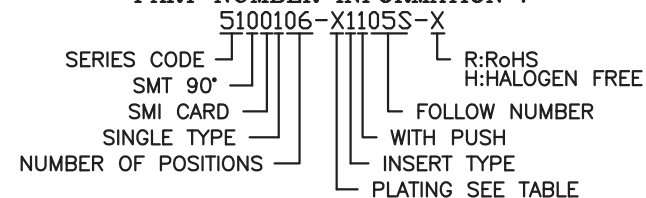

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	H	G/F + TIN

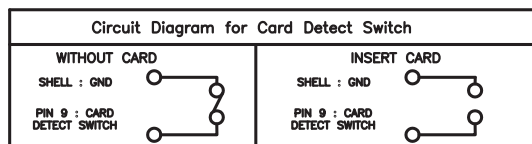

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Porgramming Voltage
Pin 7	I/O:Serial date input/output
Pin 9	CD:CARD Detect Switch

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER CHECK APP'D PRODUCT SPEC.	汉硕电子科技有限公司 NAME SIM CARD PUSH PUSH (6+1PIN) H=1.85 DRAW NO. R5100106-X1105S-X
UNITS : mm SCALE NONE SIZE A6 SHEET 1 OF 1 REV. A		