
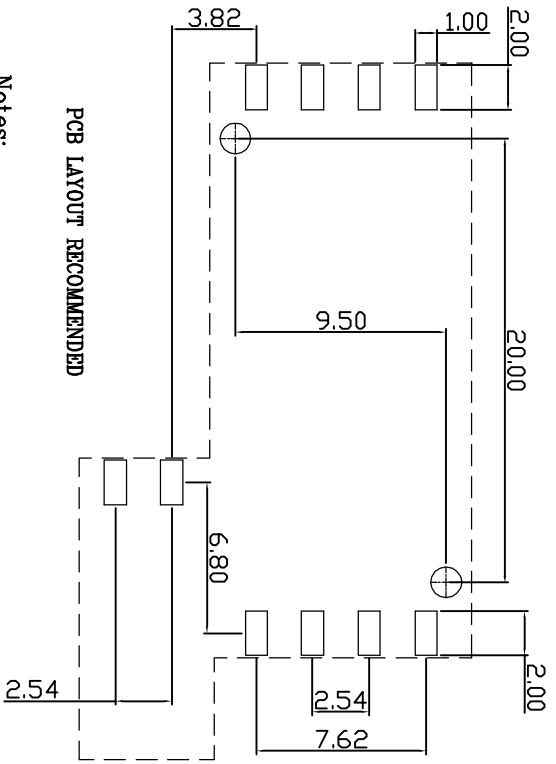
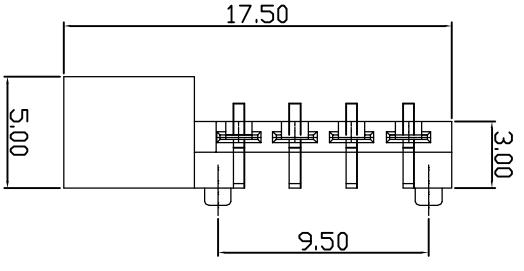


REV	DESCRIPTION	DATE

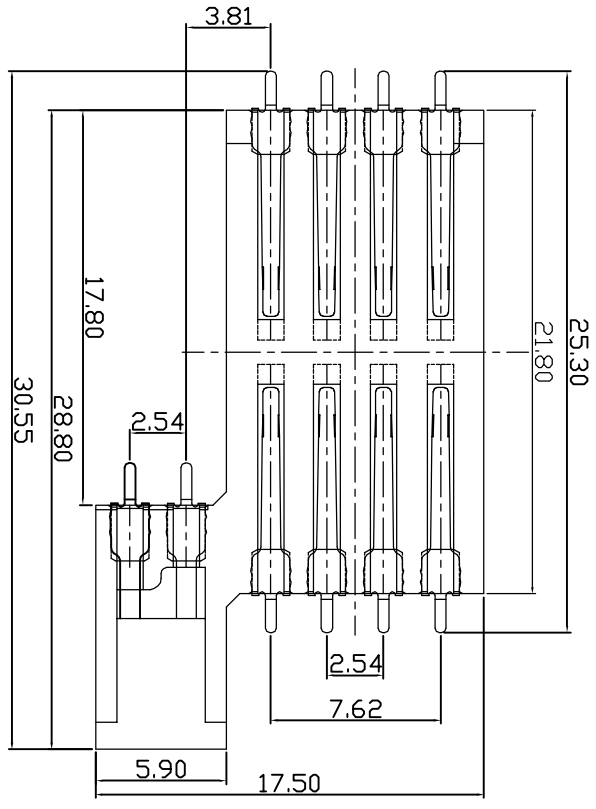


Pcb LAYOUT RECOMMENDED

Notes:

Material: Phosphor Bronze(C5191-H)
 SIM Card Connector,With
 Housing: Lcp UL 94V-0 Black

FINISH : Terminal Half Gold Fog Tin Plating
 The Terminal Plating Nickel Is Minimal 50 μ"
 Gold plated contact points 3 μ"
 Tin Welding Point Is Minimal 100 μ"

Specifications:
 Voltage Current Rating: 1A, 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperature Rating: -40° To +85°
 Durability: 100000 Cycles Min
 IR Re-Flow:260°C 15Sec Max

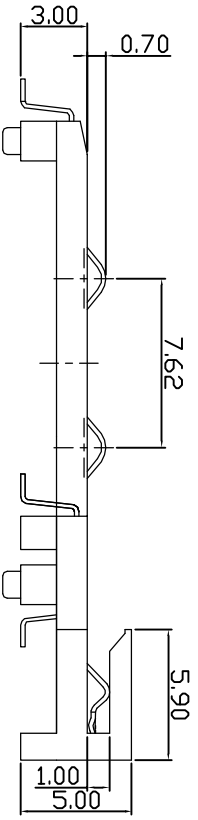

TOLERANCE	MATERIAL	UNITS	SCALE	DATE
X ±0.25	X'	± 2'	mm	1 / 1
XX ±0.15	X'X'	± 1'	CHECKED	20110922
XXX ±0.10			DRAWN	

APPROVAL: *Yhangbin*
 CHECKED: *Yhangbin*
 DRAWN: *Yhangbin*
 PROL:

DRAWN NAME:
MINI SMART CARD
H3.0MM GEARS POINT

DWG NO. **JK0080628L7**
 PART NO.

东莞市汉硕电子科技有限公司